

7 JUNE 91.

STARTRITE[®] MTC

Quality – in every respect

**Increased
Productivity**

**High
Reliability**

HB330M/HB330SA

Built to withstand the rigours of heavy duty production sawing, these models with their electronic variable speed drives, provide a cost effective way of cutting large sections, profiles and steel tubes of up to 330mm in diameter. Machines are available in either manual or semi-automatic versions.

**Low
Maintenance**



www.altsanresale.co.uk



Control Panel

A conveniently positioned, clearly marked durable control panel with a facility to operate the machine from the front or rear.

End Stop Assembly




An automatic swing away end stop assembly allows the billet to clear the sawing area at the end of cut.

Vice

Rapid clamp and quick release mechanisms provides ease of material handling and can be angled up to 45°.

Blade Guides and Brush

Carbide guide inserts coupled with roller bearings provide optimum blade support for accurate cutting.

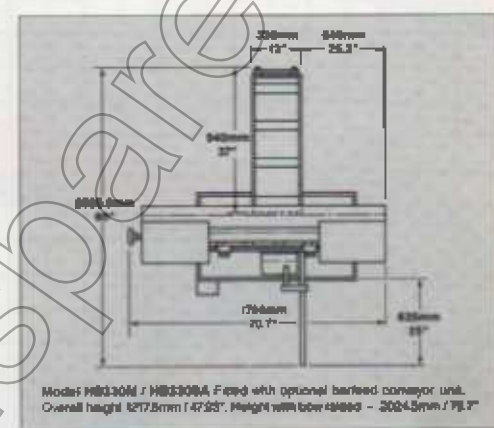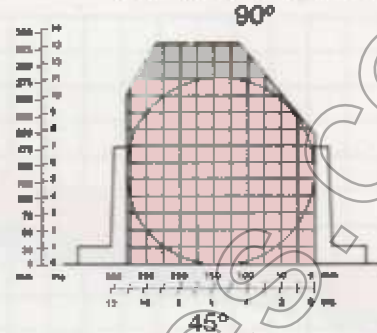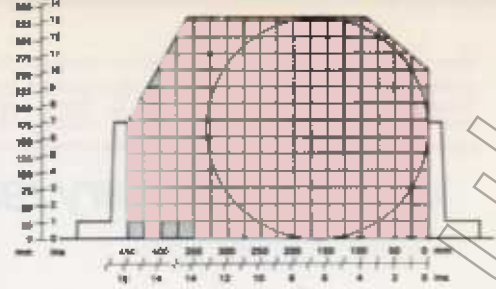

Features & Benefits

- Easy blade speed adjustment through a rugged industrial electronic drive unit guaranteed for five years.
- Electrical bow release mechanism allows once only setting of saw feed rate on each batch run.
- Heavy cast iron bed and proven construction ensures consistency of cut.
- One year warranty cover (except electronic vari-speed drive).

Other models are available together with an extensive range of vertical bandsaws, cut off saws and drills.

Startrite are also UK agents for Friggi - larger capacity bandsaws and EFI-heavy duty drilling machines.

A blade service is provided to suit your needs. For best results use Startrite Supaflex blades.

Professional after-sales service is provided by fully trained and qualified engineers.

For details on any of the products or services offered, contact or visit us now.

UK & Export Machine Sales



Model Number	HB330M/HB330SA		Standard Equipment
Drive Motor 3Ph	kW hp	1.5 2.0	<ul style="list-style-type: none"> • Totally enclosed, 1.5kW (2HP) blade drive motor. • 110 volt control with low voltage and overload protection. • Electronically variable blade speeds. • Swing away end stop assembly. • Flushing hose. • Additional stop/start controls at the rear of the machine. • M2 bi-metal blade. • Operating manual and tool kit.
Coolant Motor 3Ph	watt hp	7 0.09	
Blade Speed Range	m/min ft/min	15 to 102 50 to 330	
Blade Size	mm ins	3810 x 32 x 1.1 150 x 1.25 x 0.043	
SUPAFLEX Blades		CARBON BI-METAL M2 BI-METAL M42	
Bed Height	mm (ins)	707 (28)	
Total Height	mm (ins)	1227 (49)	
Total Width	mm (ins)	626 (25)	
Total Length	mm (ins)	1751 (70)	
Net Weight	kg (lbs)	350 (800)	
Coolant Tank Capacity		25l Simplex	
Recommended Coolant		Available in 11 or 5 litre containers	
STARCOOL 209			

STARTRITE® MTC

Quality - in every respect

THE 600 GROUP